


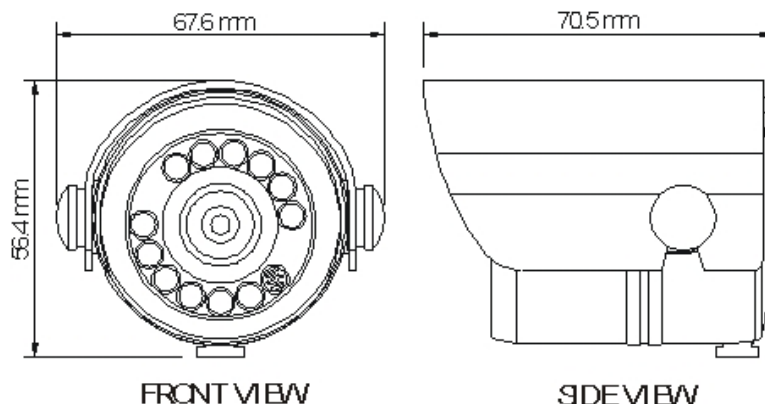

CARACTERÍSTICAS

- Cámara Color, CCD SONY Súper HAD 1/4"
- Numero de Píxeles: NTSC 270K – PAL 320K
- Sistema "Digital Signal Processor" DSP para control de imagen
- Alta Sensibilidad, baja distorsión, supresión de blanqueamiento de imagen.
- Funciones poderosas de AES, AGC, BLC, AWB
- Solución Económica - Lente de 3.6mm y Soporte incluidos
- Iluminador Infra-Rojo para situaciones de baja luminosidad – Accionamiento Automático
- Longitud de onda especial, largo alcance y larga vida útil
- Fácil instalación – Excelente estética
- Protección contra intemperies IP-67

ESPECIFICACIONES

Image Pick-up Device	SONY 1/4" Super HAD CCD Sensor.
Effective Picture Elements	NTSC: 510×492, PAL: 500×582 (H×V)
Horizontal Resolution	420 horizontal TV lines
Minimum Illumination	0.2 LUX @ F2.0
S/N Ratio	More than 50dB
Auto Electronic Shutter	EIA: 1/60s ~ 1/100,000s, CCIR: 1/50s ~ 1/110,000s.
Auto Gain Control	Yes.
Scanning System	Interlace 2:1
Gamma Characteristic	0.45
Lens Furnished	Board Lens 3.6 mm / F2.0
Synchronous System	Internal, Negative sync.
Video Output	1 Vp-p / 75 Ohms.
Infrared Illuminator	12 pieces IR LED, Life: 6000 Hrs.
Wavelength	850 nm.
Beam Spread Angle	35°.
Illuminate Distance	10 M
Illuminator Active Limit	10 Lux.
Power Supply	12V DC±10 % 3.4 Watt. (total Power consumption for CCD Camera & IR-LED full ON)
Operating Temp.	-10C to 50C (14F to 122F)
Waterproofing criteria	IP 67